

Meaningful Innovation.

WEEE Number: 80133970

02g IP65

WARRANTY* RATING

INSTRUCTION MANUAL LED SOLAR STREET LIGHT

TECHNICAL DATA

MODEL	VT-15111ST	VT-15200ST	VT-15300ST
SKU	10224 10225	10226 10227	10228 10229
LUMENS	2500Lm	3000Lm	3500Lm
SOLAR PANEL WATTS	DC: 5V, 40W/60W/70W		
BEAM ANGLE	90°		
LED CHIP TYPE	SMD 5054		
MAX. MOUNTING HEIGHT	6-8 Meters		
BATTERY TYPE	LiFePO4 3.2V Battery		
CHARGING TIME	4-6 Hours		
WORKING TIME	8-10 Hours		

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. This product is warranted for manufacturing defects only.




MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

WARNING

- 1. Installation must be performed by a qualified electrician
- 2. Replace any cracked protective shield.
- 3. Keep away from the fire.
- 4. Don't immerse in the water
- 5. Luminaire cannot be installed in low-lying areas, so as not to soak.


PARTS INCLUDED

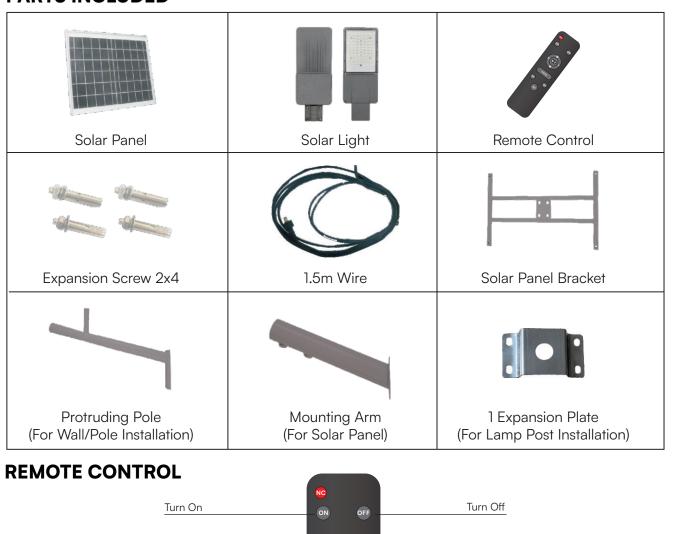


NC
ON (
*
AUTO
ЗН
ВН



This marking indicates that this product should not be disposed of with other household wastes.



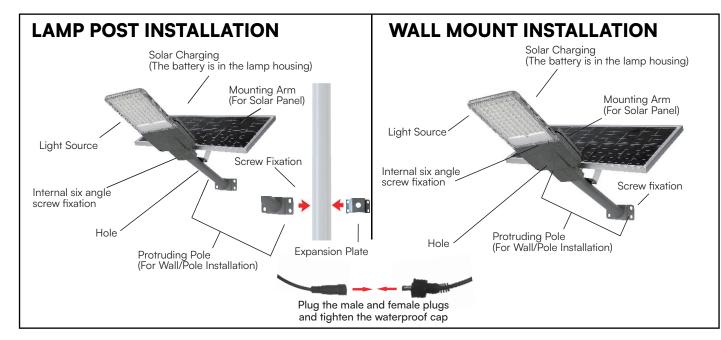

INSTALLATION GUIDE

- Before installing please remove all the parts to check if all are in good condition or not.
- Install the Protruding Pole on a wall or on a Lamp Pole with the Expansion Screws
- Fix the Solar Panel on the Bracket. Fix them on the Mounting Arm and tighten the screws.
- Place the Mounting Arm on the top pole part of the Protruding Pole
- Fix the Luminaire on the front portion of the Protruding Pole
- Make sure that the connection Plug on the luminaire is carefully stretched out from the hole beneath the Protruding Pole
- Now Connect the plugs and tighten the Waterproof Cap.
- The luminaire should be connected to the solar panel against the sun light. Please makes sure the solar panel is adjusted in correct angle in order to receive sunlight.
- After installation test the light using the remote control.
- The remote control is designed with an operation distance of 8-10m

MAINTENANCE

- Clean the light with a dry, lint-free cloth.
- Check the solar panel for dirt regularly. If dirt or is present remove it to guarantee flawless function of the product.
- Especially during the winter, keep the product free from snow and ice.
- Confirm installation direction is correct (solar panel should be at top)
- Confirm no objects blocking the solar panel to receive sunlight

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B