

# CE EMC TEST REPORT

For

#### **LED WALL LIGHT**

Model No.: VT-827, VT-77, VT-66, VT-844, VT-831, VT-830, VT-8058, VT-822, VT-828,

VT-820

Applicant: V-TAC EXPORTS LIMITED

ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL,

CENTRAL, HONGKONG

Manufacturer: V-TAC EXPORTS LIMITED

ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL,

CENTRAL, HONGKONG

Issued By: Global-Standard Testing Service Co., Ltd.

Room 1505, Building B. Chuangxir Plaza, Pingshan Avenue, Pingshan District,

Shenzhen, China

Tel: +86 755 338635092

Email: market@gstslab.com

Report Number: GST.220811.A405E

Issued Date: November 04, 2022

Date of Report: November 04, 2022

#### Note:

1. The test data and result is based on the tested sample only.

2. Please verify information in the report on GST web: www.gstslab.com through report number.

3. All rights reserve, the pirate edition investigates necessarily! This report shall not be reproduced unless under the authority of Global-Standard Testing Service Co., Ltd.

\*



# **TABLE OF CONTENTS**

	TEST CERTIFICATION	
	TEST RESULT SUMMARY	
	EUT DESCRIPTION	
	TEST INSTRUMENTS	
5.	TEST METHODOLOGY	9
	5.1. DECISION OF FINAL TEST MODE	
6	SETUP OF EQUIPMENT UNDER TEST	9 10
٠.	6.1. DESCRIPTION OF SUPPORT UNITS	
	6.2. CONFIGURATION OF SYSTEM UNDER TEST	
7.	FACILITIES AND ACCREDITATIONS	
	7.1. FACILITIES	
	7.2. ACCREDITATIONS	
_	7.3. MEASUREMENT UNCERTAINTY	
ŏ.	EMISSION TEST	12 12
	8.1.1. LIMITS	
	8.1.2. TEST PROCEDURES	
	8.1.3. TEST SETUP	
	8.1.4. TEST RESULTS	_
	8.2. RADIATED ELECTROMAGNETIC DISTURBANCE	
	8.2.1. LIMITS	
	8.2.2. TEST PROCEDURE	
	8.2.3. TEST SETUP	
	8.2.4.TEST RESULTS	
	8.3. RADIATED EMISSION MEASUREMENT	
	8.3.1. LIMITS	
	8.3.2. TEST PROCEDURE	
	8.3.3. TEST SETUP	
	8.3.4 TEST RESULTS	
	8.4. HARMONICS CURRENT MEASUREMENT	
	8.4.1. LIMITS OF HARMONICS CURRENT MEASUREMENT	
	8.4.2. TEST PROCEDURE	
	8.4.3. TEST SETUP	
	8.4.4. TEST RESULTS	
	8.5. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT	
	8.5.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT.	
	8.5.2. TEST PROCEDURE	
	8.5.3. TEST SETUP	
	8.5.4. TEST RESULTS	



Global-	Standard Testing	
		Report Reference No.: GST.220811.A405E
	UNITY TEST GENERAL DESCRIPTION	
	GENERAL DESCRIPTION GENERAL PERFORMANCE CRITERIA DESCRI	
	ELECTROSTATIC DISCHARGE (ESD)	
0.0. 2	9.3.1. TEST SPECIFICATION	
	9.3.2. TEST PROCEDURE	34
	9.3.3. TEST SETUP	35
	9.3.4. TEST RESULTS	
9.4. F	RADIATED, RADIO-FREQUENCY, ELECTROM	
	9.4.1. TEST SPECIFICATION	
	9.4.2. TEST PROCEDURE	37
	9.4.3. TEST SETUP	38
	9.4.4. TEST RESULTS	39
9.5. E	ELECTRICAL FAST TRANSIENT (EFT)	40
	9.5.1. TEST SPECIFICATION	40
	9.5.2. TEST PROCEDURE	40
	9.5.3. TEST SETUP	41
	9.5.4. TEST RESULTS	42
9.6. 5	SURGE IMMUNITY TEST	
	9.6.1TEST SPECIFICATION	43
	9.6.2. TEST PROCEDURE	43
	9.6.3. TEST SETUP	44
	9.6.4. TEST RESULTS	44
9.7. 0	CONDUCTED RADIO FREQUENCY DISTURBA	NCES (CS)45
	9.7.1. TEST SPECIFICATION	45
	9.7.2. TEST PROCEDURE	45
	9.7.3. TEST SETUP	46
	9.7.4. TEST RESULTS	46
9.8. F	POWER FREQUENCY MAGNETIC FIELD	
	9.8.1. TEST SPECIFICATION	47
	9.8.2. TEST PROCEDURE	47
	9.8.3. TEST SETUP	48
	9.8.4. TEST RESULTS	
9.9. ∖	OLTAGE DIP & VOLTAGE INTERRUPTIONS	49
	9.9.1. TEST SPECIFICATION	
	9.9.2. TEST PROCEDURE	50
	9.9.3. TEST SETUP	50

10. TEST SETUP PHOTOGRAPHS ......52
11. PHOTOGRAPHS OF EUT ......53

9.9.4. TEST RESULTS......51



# 1. TEST CERTIFICATION

Product: LED WALL LIGHT

Model: VT-827, VT-77, VT-66, VT-844, VT-831, VT-830, VT-8058, VT-822, VT-828, VT-820

**Applicant:** V-TAC EXPORTS LIMITED

ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL, CENTRAL,

**HONGKONG** 

Factory: V-TAC EXPORTS LIMITED

ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL, CENTRAL,

**HONGKONG** 

Test Voltage: AC 230V

Applicable EN IEC 55015:2019+A11:2020

Standards: EN 61547:2009

EN IEC 61000-3-2:2019 EN 61000-3-3:2013+A1:2019

#### **Deviation from Applicable Standard**

None

The above equipment has been tested by Global-Standard Testing Service Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared By: Date: November 01, 2022

Approved By: Date: November 04, 2022



# 2. TEST RESULT SUMMARY

EMISSION						
Standard	Item	Result	Remarks			
	Conducted (Main Port)	PASS	Meet limit			
EN IEC 55015:2019+A11:2020	Radiated Electromagnetic Disturbance	PASS	Meet limit			
	Radiated	PASS	Meet limit			
EN IEC 61000-3-2:2019	Harmonic current emissions	PASS	Meet limit			
EN 61000-3-3:2013+A1:2019	Voltage fluctuations & flicker	PASS	Meet limit			

IMMUNITY [EN 61547:2009]					
Standard	Item	Result	Remarks		
EN 61000-4-2:2009	ESD	PASS	Meets the requirements of Performance Criterion B		
EN 61000-4-3:2006+A1:2008 +A2:2010	RS	PASS	Meets the requirements of Performance Criterion A		
EN 61000-4-4:2012	EFT	PASS	Meets the requirements of Performance Criterion B		
EN 61000-4-5:2014+A1:2017	Surge	PASS	Meets the requirements of Performance Criterion B		
EN 61000-4-6:2014	cs	PASS	Meets the requirements of Performance Criterion A		
EN 61000-4-8: 2010	PFMF	PASS	Meets the requirements		
EN 61000-4-11:2004+A1:2017	Voltage dips & voltage variations	PASS	Meets the requirements of  Voltage dips and variations 1) 30% reduction performance Criterion C 2)100% reduction performance Criterion B		

Note: 1. The test result judgment is decided by the limit of test standard

2. The information of measurement uncertainty is available upon the customer's request.



# 3. EUT DESCRIPTION

Product	LED WALL LIGHT
Model	VT-827, VT-77, VT-66, VT-844, VT-831, VT-830, VT-8058, VT-822, VT-828,
Model	VT-820
Applicant	V-TAC EXPORTS LIMITED
Housing material	Plastic
EUT Type	<ul><li>☑ Engineering Sample. ☐ Product Sample,</li><li>☐ Mass Product Sample.</li></ul>
Serial Number	N/A
EUT Power Rating	AC 220-240V, 50/60Hz, 12W.
AC Line	N/A



# 4. TEST INSTRUMENTS

Immunity shielded room					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2023-04-28	
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-04-28	
Amplifier	Agilent	8447F	3113A06717	2023-04-28	
Amplifier	C&D	PAP-1G18	2002	2023-04-28	
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-05-05	
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2023-05-05	
Horn Antenna	ETS	3117	00086197	2023-05-05	
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-04-28	
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-04-28	
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-04-28	
AC LISN	Schwarz beck	NSLK8126	8126-224	2023-04-28	
8-WIRE LISN	Schwarz beck	8158	CAT3-8158-0059	2023-04-28	
8-WIRE LISN	Schwarz beck	8158	CAT5-8158-0117	2023-04-28	
PMF Generator	LIONCEL	PMF-801C-C	0171101	2023-04-28	
PMF Antenna	LIONCEL	PMF-801C-A	0180302	2023-04-28	
Instantaneous PMF Generator Module	LIONCEL	PMF-801C-T	0171001	2023-04-28	
Digital Power Analyzer	California Instrument	стѕ	72831	2023-04-28	
Power Source	California Instrument	5001IX-CTS-40 0	25965	2023-04-28	
ESD Generator	LIONCEL	ESD-203B	0170901	2023-04-28	
Amplifier	Agilent	8447D	2944A10179	2023-04-28	
Transient 2000	EMC PARTNER	TRA2000	863	2023-04-28	
Couple Clamp	EMC PARTNER	CN-EFT1000	513	2023-04-28	
CONDUCTED IMMUNITY TEST SYSTEM	FRANKONIA	CIT-10/75	126B1247/2013	2023-01-13	
Attenuator	EMTEST	MA-5100/6BF2	1009	2023-04-28	
CDN	Luthi	L-801M2/M3	2665	2023-04-28	
EM Injection Clamp	FCC	F-203I-23mm	91536	2022-05-28	
Signal Generator	HP	8688B	3438A00604	2023-04-28	
Power Meter	KEITHLEY	3500	1162591	2023-04-28	
Power Meter	KEITHLEY	3500	1121428	2023-04-28	
RF Power Amplifier	MicoTop	MPA-80-1000-2 50	MPA1906239	2023-04-28	



RE Power Amplifier	RF Power Amplifier MPA-80-1000-1			
Tri Tower Ampliner	МісоТор	00	MPA1906238	2023-04-28
Antenna	SCHWARZBECK	STLP 9129	9129 114	N/A
Spectrum Analyzer	Agilent	N9020A	US47140102	2023-04-28
Signal Generator	Agilent	83752A	3610A01453	2023-04-28
Vector Signal Generator	Agilent	N5182A	MY47070202	2023-04-28
Power Sensor	Agilent	U2021XA	MY54250019	2023-04-28
Power Sensor	Agilent	U2021XA	MY54250021	2023-04-28
Simultaneous Sampling	Agilent	U2531A	TW54243509	2023-04-28
Spectrum Analyzer	Agilent	E4407B	MY41440400	2023-04-28
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2023-04-28
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-04-28
Amplifier	Agilent	8447F	3113A06717	2023-04-28
Amplifier	C&D	PAP-1G18	2002	2023-04-28
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2023-05-05
Horn Antenna	ETS	3117	00086197	2023-05-05
Temperature&Humidity Chamber	GONGWEN	GDJS-800	1	2023-04-28
DC Power Supply	ATTEN	APS3005Dm	1	2023-04-28
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	I	2023-04-28
Spectrum Analyzer	Agilent	E4407B	MY41440400	2023-04-28
Spectrum Analyzer	Agilent	N9020A	US47140102	2023-04-28
Signal Generator	Agilent	83752A	3610A01453	2023-04-28
Power Divider	Weinschel	1506A	PM204	2023-04-28
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2023-04-28
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-04-28
Amplifier	Agilent	8447F	3113A06717	2023-04-28
Amplifier	C&D	PAP-1G18	2002	2023-04-28
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-05-05
Horn Antenna	ETS	3117	00086197	2023-05-05
Loop Antenna	SCHWARZBECK	HFRA 5150	5150-9453	2023-05-05
DC Power Supply	LW	APR-3003	N/A	2023-04-28

### NOTE:

- (1) The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).
- (2). N.C.R = No Calibration Request.



# 5. TEST METHODOLOGY

# **5.1. DECISION OF FINAL TEST MODE**

The EUT was tested together with the thereinafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were scanned during the preliminary test:

Pre-Test Mode					
	Conducted Emission	Mode: Normal Operating			
Emission Radiated Electromagnetic Disturbance Mode: N/A	Mode: N/A				
	Radiated Emission	Mode: Normal Operating			
Immunity		Mode: Normal Operating			

After the preliminary scan, the following test mode was found to produce the highest emission level.

Pre-Test Mode					
	Conducted Emission	Mode: Normal Operating			
Emission	Radiated Electromagnetic Disturbance	Mode: N/A			
	Radiated Emission	Mode: Normal Operating			
Immunity		Mode: Normal Operating			

# **5.2. EUT SYSTEM OPERATION**

- 1. Set up EUT with the support equipments.
- 2. Make sure the EUT work normally during the test.



# **6. SETUP OF EQUIPMENT UNDER TEST**

# 6.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1.	N/A	N/A	N/A	N/A	N/A	N/A	N/A

#### Note

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

# 6.2. CONFIGURATION OF SYSTEM UNDER TEST



(EUT: LED WALL LIGHT)



# 7. FACILITIES AND ACCREDITATIONS

# 7.1. FACILITIES

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 15. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

All measurement required was performed at laboratory of SEM Testing Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C.

### 7.2. ACCREDITATIONS

## 7.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency		Uncertainty
Conducted emissions	9kHz~30MHz		+/- 3.59dB
Radiated electromagnetic	91	⟨Hz~30MHz	+/- 4.77dB
	Horizontal	30MHz ~ 200MHz	+/- 4.77dB
Dadiated emissions	Tionzoniai	200MHz ~1000MHz	+/- 4.93dB
Radiated emissions	\/autiaal	30MHz ~ 200MHz	+/- 5.04dB
	Vertical	200MHz ~1000MHz	+/- 4.93dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



# 8. EMISSION TEST

# **8.1. CONDUCTED EMISSION MEASUREMENT**

#### 8.1.1. LIMITS

EDECLIENCY (MU-)	LIMITS(dBuV)		
FREQUENCY (MHz)	Quasi-peak	Average	
0.009-0.05	110	N/A	
0.05-0.15	90 – 80	N/A	
0.15 – 0.5	66 – 56	56 – 46	
0.50 - 5.0	56	46	
5.0 – 30.0	60	50	

#### NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from EUT or system, shall not exceed the level of field strengths specified above.

#### 8.1.2. TEST PROCEDURES

### **Procedure of Preliminary Test**

The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 9 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in Item 3.1 were scanned during the preliminary test.

After the preliminary scan, we found the test mode described in Item 3.1 producing

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

### **Procedure of Final Test**

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.


A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.



# **8.1.3. TEST SETUP**

Report Reference No.: GST.220811.A405E

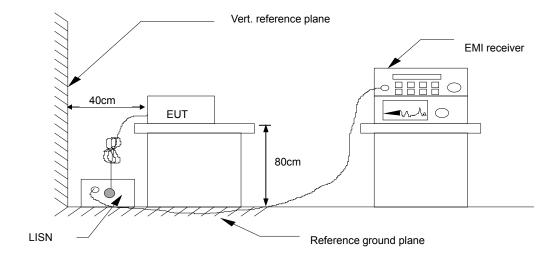



For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

# 8.1.4. TEST RESULTS

Temperature ( °C )	22~28	
Humidity ( %RH )	50~58	
Barometric Pressure ( mbar )	950~1000	
EUT	LED WALL LIGHT	
M/N	VT-827	
Operating Mode	Normal Operation	
Test Results	Pass	






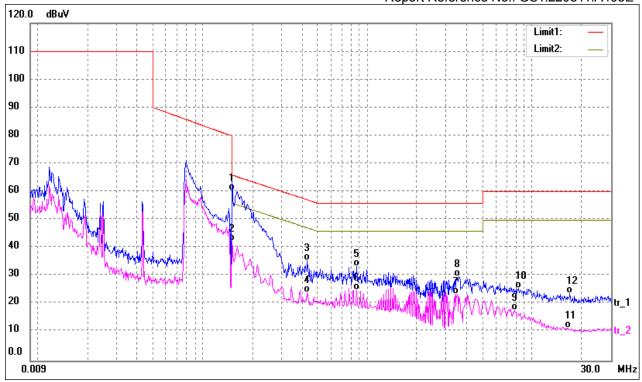


EUT:	LED WALL LIGHT	Model Name :	VT-827
Temperature:	<b>24</b> ℃	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	November 01, 2022
Test Mode :	Normal Operating	Polarization :	L
Test Power :	AC 230V		

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	50.20	10.32	60.52	65.99	-5.47	QP
2	0.1500	32.10	10.32	42.42	55.99	-13.57	AVG
3	0.4340	25.41	10.23	35.64	57.18	-21.54	QP
4	0.4340	13.79	10.23	24.02	47.18	-23.16	AVG
5	0.8620	23.35	10.16	33.51	56.00	-22.49	QP
6	0.8620	14.79	10.16	24.95	46.00	-21.05	AVG
7	3.4540	13.22	10.29	23.51	46.00	-22.49	AVG
8	3.5820	19.70	10.29	29.99	56.00	-26.01	QP
9	7.8540	7.39	10.34	17.73	50.00	-32.27	AVG
10	8.2820	15.40	10.34	25.74	60.00	-34.26	QP
11	16.4780	1.17	10.28	11.45	50.00	-38.55	AVG
12	16.8819	13.49	10.29	23.78	60.00	-36.22	QP





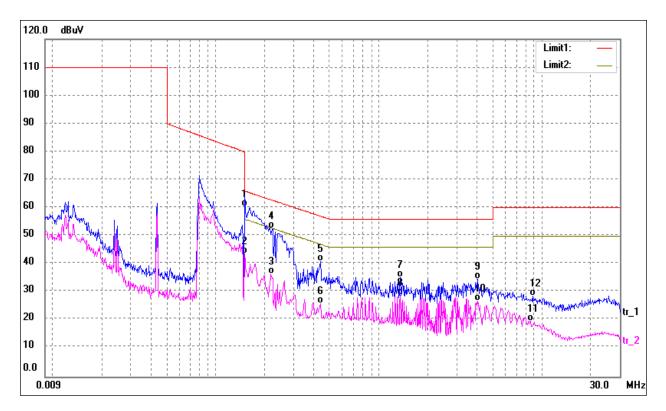

EUT:	LED WALL LIGHT	Model Name :	VT-827
Temperature:	24 ℃	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	November 01, 2022
Test Mode :	Normal Operating	Polarization :	N
Test Power :	AC 230V		

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1*	0.1500	50.09	10.32	60.41	65.99	-5.58	QP
2	0.1500	33.26	10.32	43.58	55.99	-12.41	AVG
3	0.2180	26.25	10.28	36.53	52.89	-16.36	AVG
4	0.2220	42.28	10.28	52.56	62.74	-10.18	QP
5	0.4380	30.72	10.23	40.95	57.10	-16.15	QP
6	0.4380	15.74	10.23	25.97	47.10	-21.13	AVG
7	1.3540	25.07	10.18	35.25	56.00	-20.75	QP
8	1.3540	18.66	10.18	28.84	46.00	-17.16	AVG
9	4.0140	24.28	10.30	34.58	56.00	-21.42	QP
10	4.0580	16.47	10.30	26.77	46.00	-19.23	AVG
11	8.5500	9.21	10.34	19.55	50.00	-30.45	AVG
12	8.8020	18.20	10.34	28.54	60.00	-31.46	QP



# 8.2. RADIATED ELECTROMAGNETIC DISTURBANCE

### 8.2.1. LIMITS

Frequency	Limits for loop diameter dB(uA)*				
	2m	3m	4m		
9KHz-70KHz	88	81	75		
70KHz-150KHz	88-58**	81-51**	75-45**		
150KHz-3.0MHz	58-22**	51-22**	45-16**		
3.0MHz-30MHz	22	15-16***	9-12***		

<sup>\*</sup> At the transition frequency, the lower limit applies.

Note: In Japan, the limits for frequencies 9KHz to 150KHz do not apply.

#### 8.2.2. TEST PROCEDURE

In the frequency range 9KHz to 30MHz the interference capability of the magnetic field component of the radiation of Equipment Under Test (EUT) can be determined by using a special Loop Antenna System (LAS). In the LAS, this capability is measured in terms of the currents induced by the magnetic field in the loop antennas of the LAS. The LAS allows indoor measurement.

The LAS consists of three circular, mutually perpendicular Large-Loop Antennas (LLAs), having a diameter of 2 m, supported by a non-metallic base. A  $50\Omega$  coaxial cable between the current probe of an LLA and the coaxial switch, and between this switch and the measuring equipment, shall have a surface transfer impedance smaller than  $10m\Omega/m$  at 100KHz and  $1m\Omega/m$  at 100MHz.

The distance between the outer diameter of the loop antenna system and nearby objects, such as floor and walls, shall be at least 0.5m as per CISPR 15/ EN55015.

The EUT is positioned in the center of the LAS (To avoid unwanted capacitive coupling between the EUT and the LAS, the maximum dimensions of the EUT are limited so that the distance between the EUT and an LLA is at least 0.2m). Cables should be routed together and leave the loop volume in the same octant of the cell, no closer than 0.4m to the LAS loops.

The induced current in the loop antenna is measured by means of a current probe(1V/A) and the CISPR measuring receiver(or equivalent). By means of a coaxial switch, the three field direction(X, Y, Z) can be measured in sequence, and recorded at least the six highest emission. Each value shall fulfill the requirement given.

The test data of the worst-case condition(s) was recorded.


<sup>\*\*</sup> Decreasing linearly with the logarithm of the frequency.

<sup>\*\*\*</sup> Increasing linearly with the logarithm of the frequency.



# **8.2.3. TEST SETUP**

Report Reference No.: GST.220811.A405E

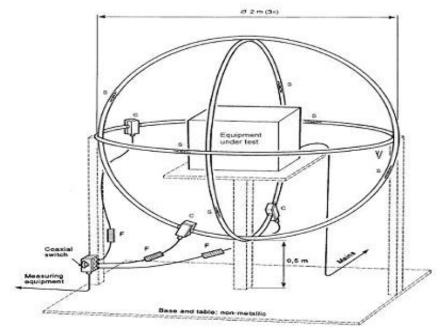

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

# **8.2.4.TEST RESULTS**

Temperature ( °C )	22~28	
Humidity ( %RH )	50~58	
Barometric Pressure ( mbar )	950~1000	
EUT	LED WALL LIGHT	
M/N	VT-827	
Operating Mode	N/A	
Test Results	N/A	



## 8.3. RADIATED EMISSION MEASUREMENT

#### 8.3.1. LIMITS

FREQUENCY (MHz)	dBuV/m (At 3m)
30 ~ 230	40
230 ~ 300	47

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

## 8.3.2. TEST PROCEDURE

# **Procedure of Preliminary Test**

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

Support equipment, if needed, was placed as per EN 55015.

All I/O cables were positioned to simulate typical usage as per EN 55015.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in EN 55015. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 300MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in Item 3.1 were scanned during the preliminary test: After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

# **Procedure of Final Test**

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Analyzer / Receiver scanned from 30MHz to 300MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.


Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.



# **8.3.3. TEST SETUP**

Report Reference No.: GST.220811.A405E

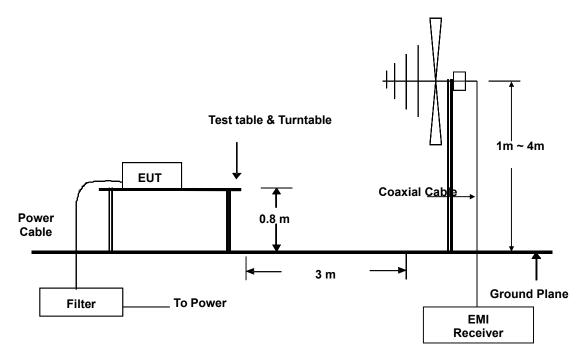


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

# 8.3.4 TEST RESULTS

Temperature ( °C )	22~28	
Humidity ( %RH )	50~58	
Barometric Pressure ( mbar )	950~1000	
EUT	LED WALL LIGHT	
M/N	VT-827	
Operating Mode	Normal Operating	
Test Results	PASS	




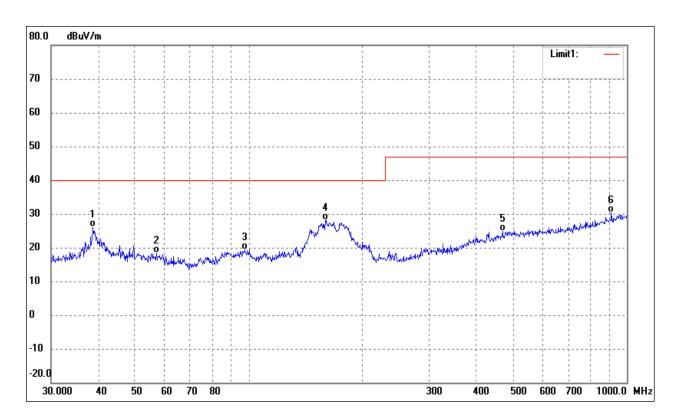


EUT:	LED WALL LIGHT	Model Name :	VT-827
Temperature:	<b>24</b> ℃	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	November 01, 2022
Test Mode :	Normal Operating	Polarization :	Vertical
Test Power :	AC 230V		

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	38.7518	35.97	-9.84	26.13	40.00	-13.87			QP
2	56.9912	29.45	-10.99	18.46	40.00	-21.54			QP
3	97.4560	30.55	-11.07	19.48	40.00	-20.52			QP
4	159.7844	41.85	-13.69	28.16	40.00	-11.84			QP
5	468.8762	28.48	-3.72	24.76	47.00	-22.24			QP
6	909.6667	29.08	1.29	30.37	47.00	-16.63			QP





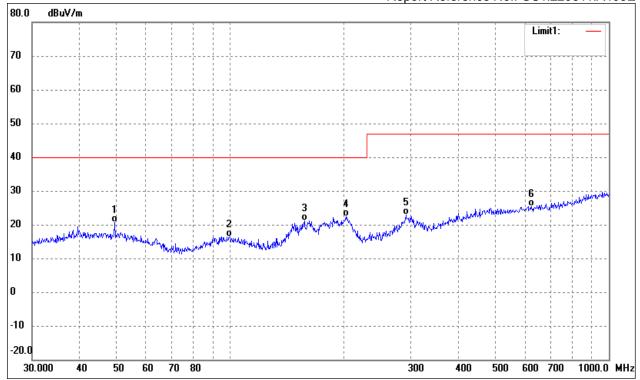

EUT:	LED WALL LIGHT	Model Name :	VT-827
Temperature:	<b>24</b> ℃	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	November 01, 2022
Test Mode :	Normal Operating	Polarization :	Horizontal
Test Power :	AC 230V		

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	49.5328	30.25	-9.66	20.59	40.00	-19.41			QP
2	99.5281	27.34	-10.90	16.44	40.00	-23.56			QP
3	157.0074	35.07	-13.82	21.25	40.00	-18.75			QP
4	202.1005	33.74	-11.24	22.50	40.00	-17.50			QP
5	291.0360	31.38	-8.44	22.94	47.00	-24.06			QP
6	625.0780	28.00	-2.67	25.33	47.00	-21.67			QP



### **8.4. HARMONICS CURRENT MEASUREMENT**

#### 8.4.1. LIMITS OF HARMONICS CURRENT MEASUREMENT

Limits for Class A equipment		Limits for Class D equipment				
Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A		
Od	ld harmonics		Odd Harmonics only			
3	2.30	3	3.4	2.30		
5	1.14	5	1.9	1.14		
7	0.77	7	1.0	0.77		
9	0.40	9	0.5	0.40		
11	0.33	11	0.35	0.33		
13	0.21	13	0.30	0.21		
15<=n<=39	0.15x15/n	15<=n<=39	3.85/n	0.15x15/n		
Eve	en harmonics					
2	1.08					
4	0.43					
6	0.30					
8<=n<=40	0.23x8/n					

NOTE: 1. Class A and Class D are classified according to item 4.4.3.

### 8.4.2. TEST PROCEDURE

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under LIGHTING operating conditions for each successive harmonic component in turn.

The classification of EUT is according to section 5 of EN 61000-3-2.

The EUT is classified as follows:

- Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.
- Class B: Portable tools; Arc welding equipment which is not professional equipment.
- Class C: Lighting equipment.
- Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.


The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

<sup>2.</sup> According to section 7 of EN 61000-3-2, the above limits apply for all equipments with a rated power more than 75W, except for lighting equipment.



# **8.4.3. TEST SETUP**

Report Reference No.: GST.220811.A405E

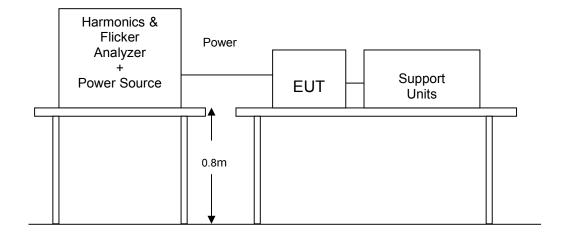

For the actual test configuration, please refer to the related item.

# 8.4.4. TEST RESULTS

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS




# E. U. T. Result

Harmonic(s	3) > 200%:	
	Order (n):	None
Harmonic(s	s) with average > 90%:	
	Order (n):	None
Harmonic(s	s) between 150% and 20	00% during more than 10% of the test time or max. 10min:
	Order (n):	None


# **Power Source Result**

First dataset out of limit:			
DS (time):	None		
Harmonic(s) out of limit:			
Order (n):	None		






Average h	Average harmonic current results					
Hn	leff [A]	leff [%]	Limit [A]	Result		
1	92.234E-3	100.000				
2	655.048E-6	0.710	972.00E-3	PASS		
3	10.276E-3	11.142	2.07	PASS		
4	2.069E-3	2.244	387.00E-3	PASS		
5	4.270E-3	4.630	1.03	PASS		
6 7	768.469E-6	0.833	270.00E-3	PASS		
7	1.351E-3	1.465	693.00E-3	PASS		
8 9	804.642E-6	0.872	207.00E-3	PASS		
9	1.488E-3	1.613	360.00E-3	PASS		
10	710.588E-6	0.770	165.60E-3	PASS		
11	1.008E-3	1.093	297.00E-3	PASS		
12	895.573E-6	0.971	138.00E-3	PASS		
13	1.778E-3	1.928	189.00E-3	PASS		
14	891.521E-6	0.967	118.29E-3	PASS		
15	1.102E-3	1.195	135.00E-3	PASS		
16	772.700E-6	0.838	103.50E-3	PASS		
17	1.266E-3	1.372	119.11E-3	PASS		
18	1.171E-3	1.270	92.00E-3	PASS		
19	909.143E-6	0.986	106.58E-3	PASS		
20	808.971E-6	0.877	82.80E-3	PASS		
21	1.163E-3	1.261	96.43E-3	PASS		
22	1.048E-3	1.136	75.28E-3	PASS		
23	1.459E-3	1.581	88.05E-3	PASS		
24	821.581E-6	0.891	68.99E-3	PASS		
25	832.532E-6	0.903	81.00E-3	PASS		
26	786.264E-6	0.852	63.69E-3	PASS		
27	1.054E-3	1.142	75.00E-3	PASS		
28	785.917E-6	0.852	59.14E-3	PASS		
29	779.776E-6	0.845	69.83E-3	PASS		
30	762.567E-6	0.827	55.20E-3	PASS		
31	1.101E-3	1.194	65.32E-3	PASS		
32	862.040E-6	0.935	51.75E-3	PASS		
33	816.708E-6	0.885	61.36E-3	PASS		
34	577.011E-6	0.626	48.71E-3	PASS		
35	881.679E-6	0.956	57.86E-3	PASS		
36	829.227E-6	0.899	46.00E-3	PASS		
37	621.672E-6	0.674	54.73E-3	PASS		
38	658.199E-6	0.714	43.58E-3	PASS		
39	609.231E-6	0.661	51.92E-3	PASS		
40	882.731E-6	0.957	41.40E-3	PASS		






Maximum	harmonic current res	ults		
Hn	leff [A]	leff [%]	Limit [A]	Result
1	92.748E-3	100.000		
2 3	727.927E-6	0.785	2.16	PASS
	10.739E-3	11.579	4.60	PASS
4	2.219E-3	2.392	860.00E-3	PASS
5	4.428E-3	4.775	2.28	PASS
6	865.163E-6	0.933	600.00E-3	PASS
7	1.516E-3	1.634	1.54	PASS
8	949.202E-6	1.023	460.00E-3	PASS
9	1.592E-3	1.716	800.00E-3	PASS
10	807.329E-6	0.870	368.00E-3	PASS
11	1.144E-3	1.233	660.00E-3	PASS
12	1.011E-3	1.090	306.66E-3	PASS
13	1.871E-3	2.017	420.00E-3	PASS
14	1.021E-3	1.101	262.86E-3	PASS
15	1.188E-3	1.281	300.00E-3	PASS
16	895.833E-6	0.966	230.00E-3	PASS
17	1.357E-3	1.463	264.70E-3	PASS
18	1.279E-3	1.379	204.44E-3	PASS
19	1.010E-3	1.089	236.84E-3	PASS
20	957.397E-6	1.032	184.00E-3	PASS
21	1.309E-3	1.412	214.28E-3	PASS
22	1.160E-3	1.250	167.28E-3	PASS
23	1.551E-3	1.672	195.66E-3	PASS
24	913.210E-6	0.985	153.32E-3	PASS
25	980.837E-6	1.058	180.00E-3	PASS
26	872.214E-6	0.940	141.54E-3	PASS
27	1.164E-3	1.255	166.66E-3	PASS
28	866.918E-6	0.935	131.42E-3	PASS
29	874.169E-6	0.943	155.18E-3	PASS
30	821.839E-6	0.886	122.66E-3	PASS
31	1.226E-3	1.321	145.16E-3	PASS
32	1.001E-3	1.080	115.00E-3	PASS
33	889.147E-6	0.959	136.36E-3	PASS
34	702.045E-6	0.757	108.24E-3	PASS
35	1.056E-3	1.138	128.58E-3	PASS
36	1.049E-3	1.131	102.22E-3	PASS
37	683.656E-6	0.737	121.62E-3	PASS
38	720.106E-6	0.776	96.84E-3	PASS
39	704.946E-6	0.760	115.38E-3	PASS
40	962.540E-6	1.038	92.00E-3	PASS






Maximum	Maximum harmonic voltage results				
Hn	Ueff [V]	Ueff [%]	Limit [%]	Result	
1	231.34	100.581			
2 3	75.91E-3	0.033	0.2	PASS	
3	105.53E-3	0.046	0.9	PASS	
4	19.46E-3	0.008	0.2	PASS	
5 6 7	46.33E-3	0.020	0.4	PASS	
6	14.92E-3	0.006	0.2	PASS	
7	27.95E-3	0.012	0.3	PASS	
8 9	15.24E-3	0.007	0.2	PASS	
	21.85E-3	0.009	0.2	PASS	
10	11.40E-3	0.005	0.2	PASS	
11	34.46E-3	0.015	0.1	PASS	
12	12.73E-3	0.006	0.1	PASS	
13	46.01E-3	0.020	0.1	PASS	
14	10.98E-3	0.005	0.1	PASS	
15	26.03E-3	0.011	0.1	PASS	
16	13.69E-3	0.006	0.1	PASS	
17	12.56E-3	0.005	0.1	PASS	
18	11.05E-3	0.005	0.1	PASS	
19	32.97E-3	0.014	0.1	PASS	
20	11.27E-3	0.005	0.1	PASS	
21	38.02E-3	0.017	0.1	PASS	
22	10.70E-3	0.005	0.1	PASS	
23	30.86E-3	0.013	0.1	PASS	
24	13.61E-3	0.006	0.1	PASS	
25	14.13E-3	0.006	0.1	PASS	
26	12.75E-3	0.006	0.1	PASS	
27	24.97E-3	0.011	0.1	PASS	
28	14.51E-3	0.006	0.1	PASS	
29	36.73E-3	0.016	0.1	PASS	
30	11.32E-3	0.005	0.1	PASS	
31	31.84E-3	0.014	0.1	PASS	
32	9.87E-3	0.004	0.1	PASS	
33	18.26E-3	0.008	0.1	PASS	
34	11.12E-3	0.005	0.1	PASS	
35	16.71E-3	0.007	0.1	PASS	
36	9.52E-3	0.004	0.1	PASS	
37	27.14E-3	0.012	0.1	PASS	
38	11.82E-3	0.005	0.1	PASS	
39	25.43E-3	0.011	0.1	PASS	
40	11.20E-3	0.005	0.1	PASS	





Harmonic	current results - DS:	12		
Hn	leff [A]	leff [%]	Limit [A]	Result
1	92.712E-3	100.000		
2	704.608E-6	0.760	1.08	PASS
3	10.639E-3	11.475	2.30	PASS
4	2.139E-3	2.307	430.00E-3	PASS
5	4.299E-3	4.636	1.14	PASS
6	832.811E-6	0.898	300.00E-3	PASS
7	1.445E-3	1.559	770.00E-3	PASS
8	884.116E-6	0.954	230.00E-3	PASS
9	1.363E-3	1.470	400.00E-3	PASS
10	763.749E-6	0.824	184.00E-3	PASS
11	875.233E-6	0.944	330.00E-3	PASS
12	972.537E-6	1.049	153.33E-3	PASS
13	1.856E-3	2.001	210.00E-3	PASS
14	979.993E-6	1.057	131.43E-3	PASS
15	1.026E-3	1.106	150.00E-3	PASS
16	839.819E-6	0.906	115.00E-3	PASS
17	1.220E-3	1.316	132.35E-3	PASS
18	1.218E-3	1.314	102.22E-3	PASS
19	904.638E-6	0.976	118.42E-3	PASS
20	936.464E-6	1.010	92.00E-3	PASS
21	1.018E-3	1.098	107.14E-3	PASS
22	1.055E-3	1.138	83.64E-3	PASS
23	1.318E-3	1.422	97.83E-3	PASS
24	860.203E-6	0.928	76.66E-3	PASS
25	935.082E-6	1.009	90.00E-3	PASS
26	854.993E-6	0.922	70.77E-3	PASS
27	994.117E-6	1.072	83.33E-3	PASS
28	829.497E-6	0.895	65.71E-3	PASS
29	780.429E-6	0.842	77.59E-3	PASS
30	734.336E-6	0.792	61.33E-3	PASS
31	1.049E-3	1.131	72.58E-3	PASS
32	887.986E-6	0.958	57.50E-3	PASS
33	759.486E-6	0.819	68.18E-3	PASS
34	613.586E-6	0.662	54.12E-3	PASS
35	1.038E-3	1.120	64.29E-3	PASS
36	693.755E-6	0.748	51.11E-3	PASS
37	652.006E-6	0.703	60.81E-3	PASS
38	679.788E-6	0.733	48.42E-3	PASS
39	625.308E-6	0.674	57.69E-3	PASS
40	874.345E-6	0.943	46.00E-3	PASS

Caution: Results related to the 100% limit values





Harmonic	Harmonic voltage results - DS: 12					
Hn	Ueff [V]	Ueff [%]	Limit [%]	Result		
1	231.31	100.571				
2	60.54E-3	0.026	0.2	PASS		
3	70.76E-3	0.031	0.9	PASS		
4	12.76E-3	0.006	0.2	PASS		
5 6 7	43.49E-3	0.019	0.4	PASS		
6	9.52E-3	0.004	0.2	PASS		
	11.86E-3	0.005	0.3	PASS		
8 9	9.42E-3	0.004	0.2	PASS		
	6.10E-3	0.003	0.2	PASS		
10	2.47E-3	0.001	0.2	PASS		
11	28.26E-3	0.012	0.1	PASS		
12	7.73E-3	0.003	0.1	PASS		
13	34.07E-3	0.015	0.1	PASS		
14	4.93E-3	0.002	0.1	PASS		
15	22.34E-3	0.010	0.1	PASS		
16	7.46E-3	0.003	0.1	PASS		
17	7.60E-3	0.003	0.1	PASS		
18	3.05E-3	0.001	0.1	PASS		
19	27.28E-3	0.012	0.1	PASS		
20	6.86E-3	0.003	0.1	PASS		
21	26.25E-3	0.011	0.1	PASS		
22	2.17E-3	0.001	0.1	PASS		
23	26.23E-3	0.011	0.1	PASS		
24	6.31E-3	0.003	0.1	PASS		
25	11.13E-3	0.005	0.1	PASS		
26	3.71E-3	0.002	0.1	PASS		
27	15.02E-3	0.007	0.1	PASS		
28	2.47E-3	0.001	0.1	PASS		
29	26.57E-3	0.012	0.1	PASS		
30	7.69E-3	0.003	0.1	PASS		
31	21.76E-3	0.009	0.1	PASS		
32	2.83E-3	0.001	0.1	PASS		
33	12.78E-3	0.006	0.1	PASS		
34	2.58E-3	0.001	0.1	PASS		
35	7.26E-3	0.003	0.1	PASS		
36	2.74E-3	0.001	0.1	PASS		
37	19.96E-3	0.009	0.1	PASS		
38	7.82E-3	0.003	0.1	PASS		
39	18.18E-3	0.008	0.1	PASS		
40	4.23E-3	0.002	0.1	PASS		



### 8.5. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

### 8.5.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT


TEST ITEM	LIMIT	REMARK
P <sub>st</sub>	1.0	P <sub>st</sub> means short-term flicker indicator.
P <sub>lt</sub>	0.65	P <sub>lt</sub> means long-term flicker indicator.
T <sub>dt</sub> (ms)	500	T <sub>dt</sub> means maximum time that dt exceeds 3 %.
d <sub>max</sub> (%)	4%	d <sub>max</sub> means maximum relative voltage change.
dc (%)	3.3%	dc means relative steady-state voltage change

#### 8.5.2. TEST PROCEDURE

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under LIGHTING operating conditions.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

#### **8.5.3. TEST SETUP**

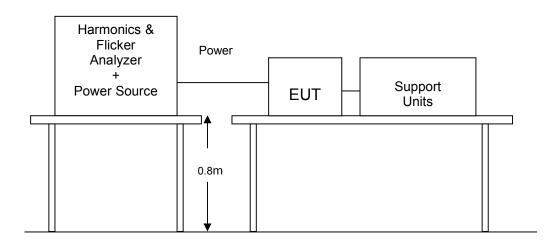

For the actual test configuration, please refer to the related item.



# 8.5.4. TEST RESULTS

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS

# Maximum Flicker results

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.005	0.005 3.30	
dmax [%]	0.269	4.00	PASS
dt [s]	0.000	0.50	PASS



# 9. IMMUNITY TEST

# 9.1. GENERAL DESCRIPTION

Product	EN 61547: 2009				
Standard	Test Type	Minimum Requirement			
	EN61000-4-2:2009	Electrostatic Discharge – ESD: 8kV air discharge, 4kV Contact discharge, Performance Criterion B			
	EN61000-4-3:2006+A1:2008 +A2:2010	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80 ~1000 MHz, 3V/m, 80% AM(1kHz), Performance Criterion A			
	EN61000-4-4:2012	Electrical Fast Transient/Burst - EFT, Power line: 1kV, Signal line: 0.5kV, Performance Criterion B			
Basic Standard, Specification, and Performance Criterion required	EN61000-4-5:2014	Surge Immunity Test: 1.2/50 us Open Circuit Voltage, 8 /20 us Short Circuit Current, Power Port ~ Line to line: 0.5kV, Line to ground: 1kV ( to self-ballasted lamps and semi-luminaries; Iuminaires and independent auxiliaries which are less than 25W) Power Port ~ Line to line: 1kV, Line to ground: 2kV (to luminaires and independent auxiliaries which are more than 25W) Signal Port: 0.5kV Performance Criterion B			
	EN61000-4-6:2014	Conducted Radio Frequency Disturbances Test –CS: 0.15 ~ 80 MHz, 3Vrms, 80% AM, 1kHz, Performance Criterion A			
	EN61000-4-8: 2010	Power frequency magnetic field immunity test 50 Hz, 3A/m Performance Criterion A			
	EN61000-4-11:2004	Voltage Dips and Interruptions: ii) 30% reduction for 10 period, Performance Criterion C 100% reduction for 0.5 period Performance Criterion B			



# 9.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION

Criteria A:	During the test no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.
Criteria B:	During the test the luminous intensity may change to any value. After the test the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.
Criteria C:	During and after the test any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to LED TUBE if necessary by temporary interruption of the mains supply and/or operating the regulating control.  Additional requirement for lighting equipment incorporating a starting device: After the test the lighting equipment is switched off. After half an hour it is switched on again. The lighting equipment shall start and operate as intended.

# 9.3. ELECTROSTATIC DISCHARGE (ESD)

#### 9.3.1. TEST SPECIFICATION

Basic Standard: EN 61000-4-2

**Discharge Impedance:** 330ohm **Charging Capacity:** 150pF

**Discharge Voltage:** Air Discharge: 8 kV (Direct)

Contact Discharge: 4 kV (Direct/Indirect)

**Polarity:** Positive & Negative

Number of Discharge: Minimum 10 times at each test point

**Discharge Mode:** 1 time/s

Performance Criterion: B



#### 9.3.2. TEST PROCEDURE

The discharges shall be applied in two ways:


- a) Contact discharges to the conductive surfaces and coupling planes:
  - Twenty dischargers (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure, terminals are excluded. In case of a non-conductive enclosure, dischargers shall be applied on the horizontal or vertical coupling planes. Test shall be performed at a maximum repetition rate of one discharge per second.
- b) Air discharges at slots and apertures and insulating surfaces: On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:

- a) The EUT was located 0.1 m minimum from all side of the **HCP** (dimensions 1.6m x 0.8m).
- b) The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10 cm with EUT.
- c) The time interval between two successive single discharges was at least 1 second.
- d) Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each **HCP** opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the **HCP** and perpendicular to its front edge during the discharge.
- g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** (**VCP**) in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.



#### **9.3.3. TEST SETUP**

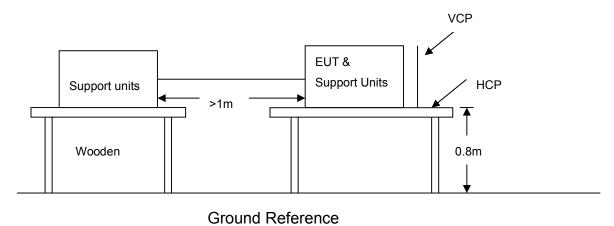

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### NOTE:

### **TABLE-TOP EQUIPMENT**

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



# 9.3.4. TEST RESULTS

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS

Air Discharge						
		Test Levels	Results			
Test Po	Test Points □ 8 kV Pass Fail Performand Criterion		Performance Criterion	Observation		
Slots	6Points	$\boxtimes$	$\boxtimes$		В	Note □ 1 ⊠ 2
Port	2Points	$\boxtimes$	$\boxtimes$		В	Note

Contact Discharge						
Test Points		Test Levels	Results			
		□ <b>4 kV</b>	Pass	Fail	Performance Criterion	Observation
Metal 4Points			$\boxtimes$		В	Note
HCP	4Points	$\boxtimes$			В	Note ☐ 1 🖂 2
VCP	4Points	$\boxtimes$	$\boxtimes$		В	Note ☐ 1 ⊠ 2

NOTE: 1. There was no change compared with initial operation during the test.2. The loss of function of the EUT during the test and it was recovered by itself operation after the test.



# 9.4. RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)

#### 9.4.1. TEST SPECIFICATION

Basic Standard: EN 61000-4-3

Frequency Range: 80 MHz ~1000 MHz,

Field Strength: 3 V/m

**Modulation:** 1kHz Sine Wave, 80%, AM Modulation

Frequency Step: 1 % of preceding frequency value


**Polarity of Antenna:** Horizontal and Vertical

Test Distance: 3 m
Antenna Height: 1.5m
Performance Criterion: A

#### 9.4.2. TEST PROCEDURE


The test procedure was in accordance with EN 61000-4-3

- a) The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- b) The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1 kHz sine-wave. The rate of sweep did not exceed 1.5 x 10<sup>-3</sup> decade/s, where the frequency range is swept incrementally; the step size was 1% of preceding frequency value.
- c) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.





#### **9.4.3. TEST SETUP**

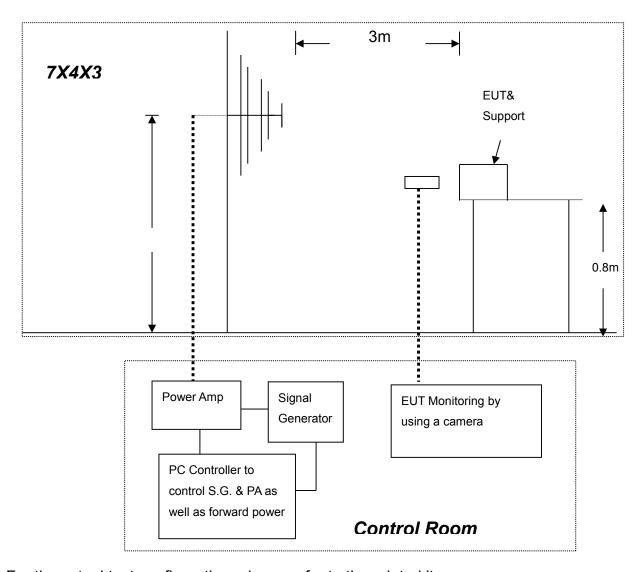

For the actual test configuration, please refer to the related item.

#### NOTE:

#### **TABLETOP EQUIPMENT**

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

#### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.



## 9.4.4. TEST RESULTS

Report Reference No.: GST.220811.A405E

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS

Frequency (MHz)	Polarity	Position	Field Strength (V/m)	Observation	Result
80 ~ 1000	V&H	Front	3	Note	PASS
80 ~ 1000	V&H	Rear	3	Note	PASS
80 ~ 1000	V&H	Left	3	Note	PASS
80 ~ 1000	V&H	Right	3	Note	PASS

**NOTE:** There was no change compared with the initial operation during the test.



## 9.5. ELECTRICAL FAST TRANSIENT (EFT)

#### 9.5.1. TEST SPECIFICATION

Basic Standard: EN 61000-4-4

Test Voltage: Power Line: 1 kV

Signal/Control Line: 0.5 kV

**Polarity:** Positive & Negative

Impulse Frequency: 5 kHz
Impulse Wave-shape: 5/50 ns
Burst Duration: 15 ms
Burst Period: 300ms

Test Duration: Not less than 1 min.

Performance Criterion: B

#### 9.5.2. TEST PROCEDURE


a) Both positive and negative polarity discharges were applied.


- b) The length of the "hot wire" from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
- c) The duration time of each test sequential was 1 minute.
- d) The transient/burst waveform was in accordance with EN 61000-4-4, 5/50ns.





#### **9.5.3. TEST SETUP**

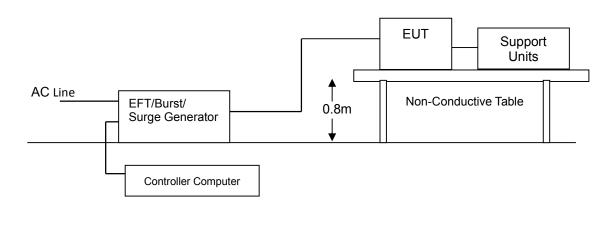

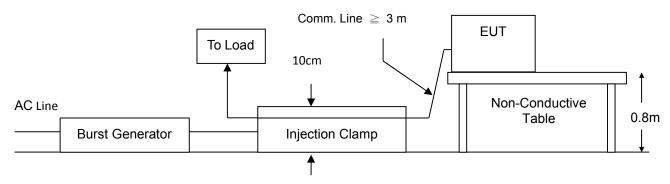

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### NOTE:

### **TABLETOP EQUIPMENT**

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

#### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.



## 9.5.4. TEST RESULTS

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L 1	+/-	1	В	Note □ 1 ⊠ 2	PASS
L 2	+/-	1	В	Note ☐ 1	PASS
L 1–L 2	+/-	1	В	Note ☐ 1   ⊠ 2	PASS
PE	+/-	1	В	Note ☐ 1	N/A
L – PE	+/-	1	В	Note ☐ 1	N/A
N – PE	+/-	1	В	Note ☐ 1	N/A
L – N – PE	+/-	1	В	Note ☐ 1     ⊠ 2	N/A
RJ45 UTP cable				Note 🗆 1 💮 2	N/A

**NOTE:** 1. There was no change compared with initial operation during the test.

<sup>2.</sup> The loss of function of the EUT during the test and it was recovered by itself operation after the test.



#### 9.6. SURGE IMMUNITY TEST

#### 9.6.1TEST SPECIFICATION

Basic Standard: EN 61000-4-5

Wave-Shape: Combination Wave

1.2/50 us Open Circuit Voltage8/20 us Short Circuit Current

**Test Voltage:** Power line ~ line to line: 1 kV;

line to ground: 2kV

Telecommunication line: 1 kV;

Surge Input/Output: Power Line: L-N/ N-PE / L-PE

Telecommunication line: T-Ground / R-Ground

**Generator Source Impedance:** 2 ohm between networks

12 ohm between network and ground

**Polarity:** Positive/Negative

Phase Angle: 90/270

Pulse Repetition Rate: 1 time / min. (maximum)

**Number of Tests:** 5 positive and 5 negative at selected points

Performance Criterion: B

#### 9.6.2. TEST PROCEDURE

a) For EUT power supply:

The surge is applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.


- b) For test applied to unshielded un-symmetrically operated interconnection lines of EUT: The surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.
- c) For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:

The surge was applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor were not specified. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.





## **9.6.3. TEST SETUP**

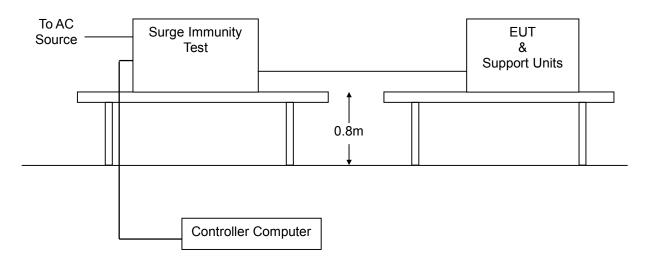

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 9.6.4. TEST RESULTS

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L - N	+/-	0.5	В	Note ☐ 1   ⊠ 2	PASS
L - PE	1	1	1	Note □ 1 □ 2	N/A
N - PE	1	1	1	Note ☐ 1 ☐ 2	N/A
R - Ground	1	/	1	Note ☐ 1 ☐ 2	N/A
T - Ground	1	1	1	Note   1  2	N/A

**NOTE:** 1. There was no change compared with initial operation during the test.

<sup>2.</sup> The loss of function of the EUT during the test and it was recovered by itself operation after the test.



## 9.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

#### 9.7.1. TEST SPECIFICATION

Basic Standard: EN 61000-4-6

Frequency Range: 0.15 MHz ~ 80 MHz

Field Strength: 3 V

**Modulation:** 1kHz Sine Wave, 80%, AM Modulation

Frequency Step: 1 % of preceding frequency value

Coupled cable: Power Mains, Shielded CDN-M3/2 (3 wires)

**Performance Criterion:** A

#### 9.7.2. TEST PROCEDURE

The EUT shall be tested within its intended operating and climatic conditions.

The test shell performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.


The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 1.5 x 10<sup>-3</sup> decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80 MHz.

The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, was analyzed separately.

Attempts was made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.



#### **9.7.3. TEST SETUP**

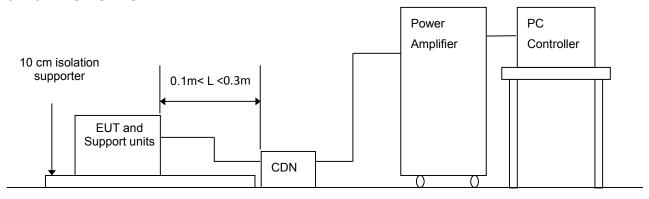

Note: 1. The EUT is setup 0.1m above Ground Reference Plane

2. The CDNS and / or EM clamp used for real test depends on ports and cables configuration of EUT.

For the actual test configuration, please refer to the related item.

#### NOTE

#### TABLE-TOP AND FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

#### 9.7.4. TEST RESULTS

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS

Frequency Band (MHz)	Field Strength (Vrms)	Injected Position	Injection Method	Performance Criterion	Observation	Result
0.15 ~ 80	3	AC Mains	CDN-M3	Α	Note ⊠1  ☐2	PASS
0.15 ~ 80	3	N/A			Note	N/A

NOTE: 1. There was no change compared with initial operation during the test.

<sup>2.</sup> The loss of function of the EUT during the test and it was recovered by itself operation after the test.



## 9.8. POWER FREQUENCY MAGNETIC FIELD

#### 9.8.1. TEST SPECIFICATION

Basic Standard: EN 61000-4-8

Frequency Range: 50Hz, Field Strength: 3A/m Observation Time: 5 minutes

**Inductance Coil:** Rectangular type, 1mx1m


**Performance Criterion:** A

#### 9.8.2. TEST PROCEDURE

- a) The equipment is configured and connected to satisfy its functional requirements. It shall be placed on the GRP with the interposition of a 0.1m-thick insulating support.
- b. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- c. The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- d. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.



#### **9.8.3. TEST SETUP**

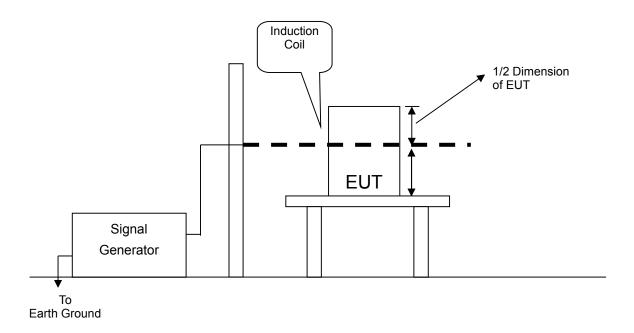

For the actual test configuration, please refer to the related item.

#### NOTE:

#### **TABLETOP EQUIPMENT**

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

#### FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.



#### 9.8.4. TEST RESULTS

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS

DIRECTION	Field Strength (A/m)	Performance Criterion	OBSERVATION	RESULTS
X	3	A	Note ⊠ 1 □ 2	PASS
Y	3	A	Note ⊠ 1 □ 2	PASS
Z	3	A	Note ⊠1 □2	PASS

NOTE: 1. There was no change compared with initial operation during the test.

## 9.9. VOLTAGE DIP & VOLTAGE INTERRUPTIONS

## 9.9.1. TEST SPECIFICATION

Basic Standard: EN 61000-4-11

**Test Duration Time:** Minimum three test events in sequence

**Interval Between Event:** Minimum 10 seconds

**Phase Angle:** 0 / 45 / 90 / 135 / 180 / 225 / 270 / 315 / 360

**Test Cycle:** 3 times

Performance Criterion: B,C

<sup>2.</sup> The loss of function of the EUT during the test and it was recovered by itself operation after the test.




## 9.9.2. TEST PROCEDURE

- 1. The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
- 2. Setting the parameter of tests and then perform the test software of test simulator.
- 3. Conditions changes to occur at 0 degree crossover point of the voltage waveform.
- 4. Recording the test result in test record form.

#### **9.9.3. TEST SETUP**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

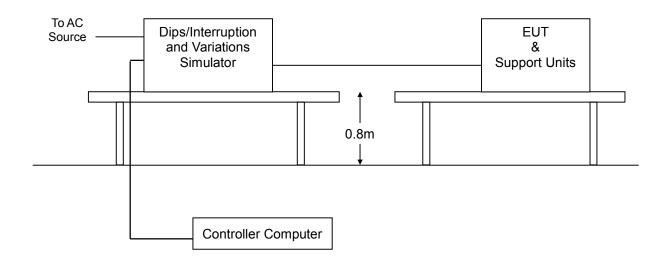




## 9.9.4. TEST RESULTS

Temperature ( °C )	22~28
Humidity ( %RH )	50~58
Barometric Pressure ( mbar )	950~1000
EUT	LED WALL LIGHT
M/N	VT-827
Operating Mode	Normal Operating
Test Results	PASS

Test Power: AC 230V							
Voltage Duration Performance Observation Test Result							
100	0.5	□А	⊠В □С	Note ☐ 1 ⊠ 2 ☐ 3	PASS		
30	10	□А	□В⊠С	Note □ 1 □ 2 ⊠ 3	PASS		

**NOTE:** 1.There was no change compared with initial operation during and after the test. No unintentional response was found during the test.

- 2. The function stopped during the test, but can be recoverable by itself operation after the test.
- 3. The function stopped during the test, but can be recoverable manually after the test.






# **10. TEST SETUP PHOTOGRAPHS**

## **CONDUCTED EMISSION MEASUREMENT**



**RADIATED EMISSION TEST** 

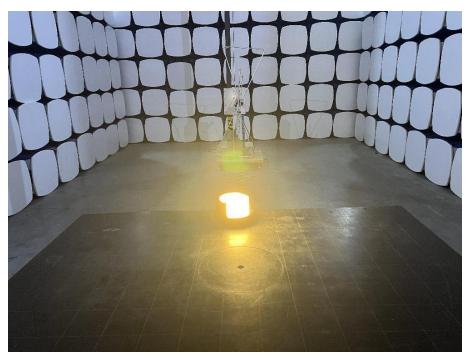



# 11. PHOTOGRAPHS OF EUT

Photo 1

View:

 $[\sqrt{\ }]$  Front

[ ] Rear

[ ] Right side

[ ] Left side

[ ] Top

[ ] Bottom

[ ] Internal

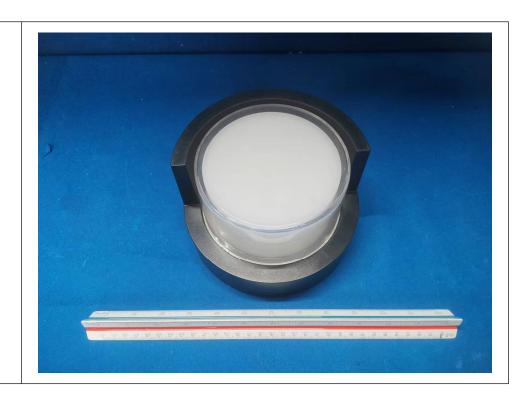


Photo 2

View:

[ ] Front

[√] Rear

[ ] Right side

[ ] Left side

[ ] Top

Bottom

[ ] Internal





## Photo 3

## View:

[ ] Front

[ ] Rear


[ ] Right side

[ ] Left side

[ ] Top

[ ] Bottom

[√] Internal

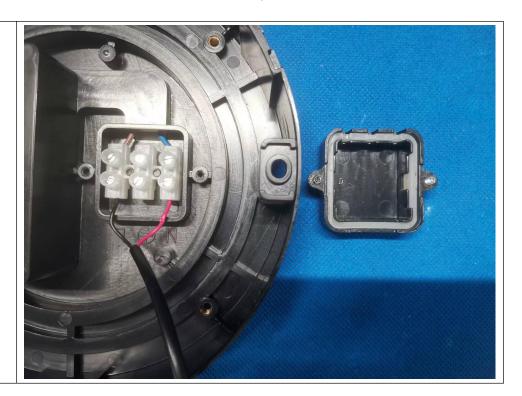

## Photo 4

## View:

[ ] Front

[ ] Rear

[ ] Right side

[ ] Left side

[ ] Top

[ ] Bottom

[√] Internal








Photo 5

View:

[ ] Front

[ ] Rear

[ ] Right side

[ ] Left side

[ ] Top

[ ] Bottom

[√] Internal

---END---