


V-TAC[®]

INNOVATIVE LED LIGHTING

WEEE Number: 80133970

INSTALLATION INSTRUCTION LED GROUND LAMP WITH EPISTAR CHIP

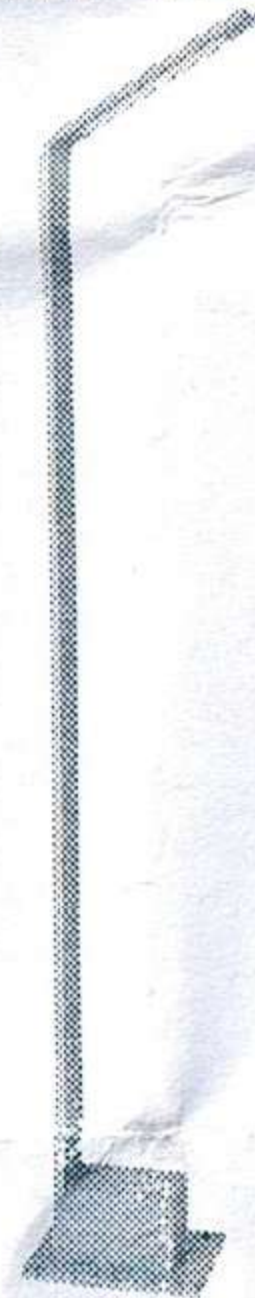

2 YEARS
WARRANTY*

TECHNICAL DATA:

Model	Watts	Lumens	Beam Angle	Body Type	CRI	PF	IP Rating	Dimension	Input Power
VT-896	7	750	120°	Aluminium	>80	>0.5	IP54	150*95*800mm	AC:220-240v,50/60Hz

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

In case of any query/issue with the product, please reach out to us at: support@v-tac.eu
For More products range, inquiry please contact our distributor or nearest dealers. V-TAC EUROPE LTD. Bulgaria, Plovdiv 4000, bul.L.Karavelow 9B

WARNING!

1. Please make sure to turn off the power before starting the installation.
2. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
3. Install only by certified Electrician.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

INSTALLATION INSTRUCTION

Step 1: Switch off the power before starting the installation.

Step 2: Release the base plate by unscrewing the set screws from the bottom of the luminaire by using an allen wrench (included). Fix the power cable through the base plate, then drill the holes on the ground by using the base plate as a guide. Fix the base plate to the ground using the plugs and screws (included).

Step 3: Wire and connect the power cable to the terminal block.

Step 4: Mount the luminaire on the base plate using the set screws. Make sure the set screws are properly fixed using the allen screws.

Step 5: Switch on the power to test the light.

INSTALLATION DIAGRAM

